

# Residential/Light Commercial Generator Accessories

## KOHLER POWER SYSTEMS

### Load Control Module (LCM)

**ISO 9001**  
KOHLER  
POWER SYSTEMS  
NATIONALLY REGISTERED



**LCM with Pre-Wired Harness**



**LCM with Terminal Block Connections**

## Load Management

- The Load Control Module (LCM) sheds loads to prevent generator overload, in compliance with NEC 2008.
- The LCM monitors generator current and frequency to determine when to shed loads. This monitoring prevents frequency drops that can damage valuable electronics like computers and televisions.
- Load management with the LCM allows the use of a smaller generator set.

## Priority Setting

- Loads are added and shed according to their priority. Load 1 is the top priority, which is added first and shed last. Load 6 is the lowest priority.
- Less critical loads can be turned off automatically when essential appliances are running.
- Load priorities are hard-wired at installation.

## Standard Features

- The LCM can be used with Kohler generator sets equipped with the RDC2 or DC2 controller, including the following models:
  - 14RESA and 14RESAL
  - 20RESA and 20RESAL
  - 48RCL
- Automatically manages up to six residential loads:
  - Four power relays for management of non-essential secondary loads.
  - Two relays to control two independent air conditioner loads.
- User interface for load status indication:
  - An industry first: Test button allows the operator to cycle the relays in the order of their priority (only functions when the generator set is in RUN mode).
  - Dual color LEDs for each load indicate load status (powered or shed) and flash to indicate a test.
- NEMA 3R aluminum enclosure for indoor or outdoor installation.
- Available with two wiring options:
  - With 2-foot color-coded pre-wired harness for easy installation of the LCM next to the distribution panel.
  - With terminal block connections for installation of the LCM in any location.

## Operation

- Loads are automatically added or disconnected based on generator capacity.
- The Kohler-patented load control system uses dynamic logic to prevent shedding important loads unnecessarily when air conditioning, refrigerator, or water pump motors start.
- The LCM and generator communicate to provide smart power management. The time to shed loads decreases as each load is shed to quickly adapt to critical power requirements.
- Load shed power level and frequency setpoint adjustments are possible only by using Kohler® SiteTech™ software, available to Kohler-authorized distributors and dealers.


## Specifications

	Rating	Wire Size
Power Relays (qty. 4)	40 A @ 240 VAC	#8 AWG (pre-wired harness) 8-18 AWG (terminal block)
HVAC Relays (qty. 2)	30 VAC Class 2	12-24 AWG
Module Communication and Power Connections to the RDC2/DC2 controller	0.5 A @ 12 VDC	Belden #9402 shielded, twisted-pair or equivalent cable 12-20 AWG

## Weights and Dimensions

Shipping Weight: with terminal block: 8 kg (17 lbs.)  
 with harness: 13 kg (28 lbs.)

Dimensions:  
 H x W x D mm (in.) 486 x 391 x 135 (18.4 x 15.4 x 5.3)

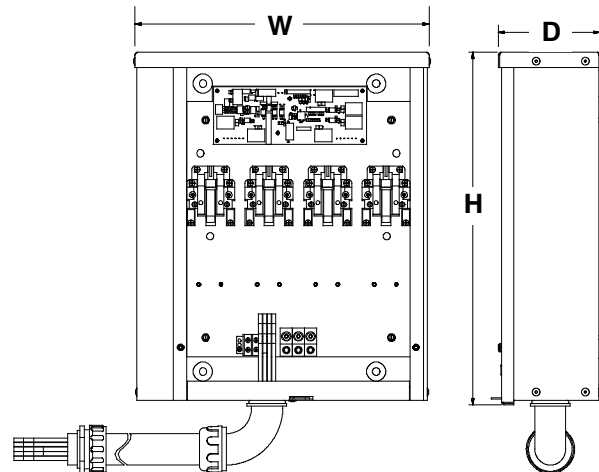

Shown with optional harness.

**DISTRIBUTED BY:**

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.